



Opti-X 48GX

48-Port Gbp/s (SFP) Layer 2/3 MPLS Module

Opti-x 48GX module provides 48-ports Optical GigE (SFP) connections for customer to extended long distance their network access. This module will permit full Non-blocking connectivity through the entire port configuration, allowing the absolute flexibility of defined QoS service guarantee. This module is an optional module for the OptiCore 400 or 800, along with the capability of functioning as a stand alone device when configured as an OptiEdge product.

Standards and Compliance

IEEE

802.3/802.3u/802.3z	10Base-T, 100Base-TX, 1000Base-SX
802.3ab	1000Base-T
802.3x	Flow Control
802.3ac	Extension for VLAN Tagging
802.1D	Bridging
802.1Q	Virtual LAN
802.1w	Rapid Spanning Tree
802.1s	Multiple Spanning Tree
802.3ad	Link Aggregation
802.1p	Priority Support
802.1x	Port Security
802.3ah	Ethernet First Mile
802.1ab	LLDP
802.1v	MAC-based IP-Subnet, Protocol based

IETF


RFC1812	IPv4
RFC1157	SNMP Protocol
RFC2819/2021/1757	RMON I e RMON II
RFC2865/2138/2058	RADIUS Authentication/Authorization
RFC2030	Simple Network Time Protocol (SNTP) v4
RFC3619	EAPsv1
RFC3164	Syslog Protocol
RFC1058/1723	RIP/RIPv2
RFC1583/2178	OSPFv2
RFC1112/2236/3376	IGMPv1/IGMPv2/IGMPv3
RFC2474/2475	DiffService

MIBs

Bridge MIB	RFC1493
Entity MIB	RFC2037
Interface MIB	RFC1229/1573/2233/2863
MIB-II	RFC1213
ETHERLIKE-MIB	RFC1398/1623/1643/2665
Extended Bridge MIB	RFC2674 (Q-Bridge-MIB, P-Bridge-MIB)
RMON-MIB	RFC1757
RS-232-MIB	
SNMPv2-MIB	
SNMPv2-SMI	
SNMPv2-TC	
TCP-MIB	
UDP-MIB	

Hardware Specifications

Switch Layer 2	Wire Speed
Switch Layer 3	Wire Speed
QoS	L2-L4
MPLS	L2-L4
PoE	N/A
Packet Buffer	128 MB
Ports	48x10/100/1000BaseT
Switch Fabric (internal)	96Gbit/s
Flash	64 MB
SDRAM	256MB
MAC address table	16K*
L3 hosts (IPv4)	8k*
L3 hosts (IPv6)	4k*
L3 Routes (IPv4)	12k*
L3 Routes (IPv6)	6k*
L2 Multicast groups	1k
L3 Multicast groups (IPv4)	2k
L3 Multicast groups (IPv6)	512
Filters	4k
Meters	2k
Counters	2k

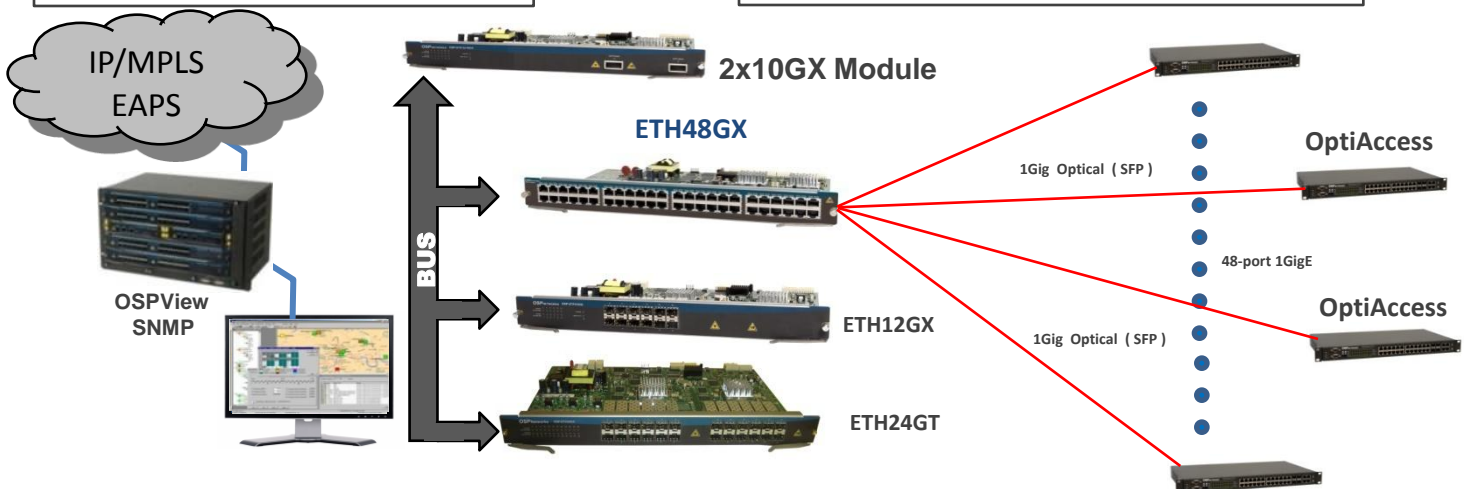

*MPLS will be released as of Q4 2009 in several scheduled updates.



Opti-X 48GX

48-Port 1Gbp/s (SFP) Layer 2/3 Module

MPLS	VPWS - L2 VPN over MPLS (Draft Martini)
	LER / LSR Support
	Label Distribution Protocol (LDP)
	Mapping between 802.1p and EXP Field of MPLS
	BGP/VPN - L3 VPN over MPLS (RFC 2547/4364)
	VPLS – Virtual LAN Services
	Resource Reservation Protocol-Traffic Engineering (RSVP-TE)
Management	Command Line Interface (CLI) via SSH, Telnet and Console
	Web Server with SSLv3
	SNMP v1/v2c/v3
	RMON grupos 1, 2, 3 and 9
	Configuration of ACLs with multiple comparisons and actions
	Network diagnosing tools for (telnet, traceroute and Ping)
	Cabling diagnostics tools
	Up to 2 firmwares flash, with upgrade via TFTP or HTTP/HTTPS
	4 Flash settings with upload and download via TFTP or HTTP / HTTPS
	Link OAM (EFM – IEEE 802.3ah)
	Link Layer Discovery Protocol (LLDP – IEEE 802.1AB)
	Static or dynamic IP address (DHCP / BOOTP)
	DHCP relay with option 82
	SNMP filters for controlling access to Web, Telnet and SSH
Security	IEEE 802.1x Port authentication with guest Vlan, restricted Vlan and Vlan assignment
	MAC addresses configuration limit per port and VLAN
	Local and Remote Syslog
	Authentication, authorization and accounting with RADIUS & TACACS +
	E-mail notification (SMTP)
	Mechanisms for protecting against attacks from Denial of Service (DoS)
	SNTp
VLAN	Tagging for up to 4096 simultaneous VIDs (IEEE 802.1Q)
	MAC-based, IP-Subnet based, Protocol-based (IEEE 802.1v)
	Q-in-Q double tagging
	Private VLAN
	Dynamic VLAN (GVRP)
Link Aggregation	32 logical groups, with up to 8 ports in each active group
	Static or dynamic way settings LACP (IEEE 802.3ad)
	Configuration criterion for load balancing .

Auto-negotiation	Speed, duplex mode, flow control and MDI/MDIX
Flow Control	Backpressure in half duplex; PAUSE (IEEE 802.3x) in full duplex
Protection	Classic Spanning Tree (IEEE 802.1D)
	Rapid Spanning Tree (IEEE 802.1w)
	Per-VLAN Rapid Spanning Tree
	Multiple Spanning Tree (IEEE 802.1s)
	BPDU Guard, EAPsv1, Link flap detection, Loopback detection
QoS (marking, classification and prioritization)	8 queues per port
	TCI tagging (IEEE 802.1p)
	IP Precedence/TOS or DSCP/TOS
	Source/Destination IP or MAC
	TCP ports ou UDP ports
	Generic L2-L7 filter match
	Rate Shapping (Ingress and Egress), communications granularity of 64 Kbit/s per port and flow via definition of CIR and PIR
	Weighted Round Robin, Weighted Fair Queuing, Strict priority or combination of these techniques and algorithms for scheduling queues
	Dual WRED configurations, one for in-profile and one for out-of-profile
	Additional Layer 2 Functionality
Head of Line Blocking protection	
Up to 9Kb Jumbo Frame support	
IGMP (v1/v2/v3). Snooping Query functionality may be used	
Ageing global Layer 2 or by VLAN	
Layer 2 Protocol Tunneling	
Additional Layer 3 Functionality	Traffic Monitor per port and / or flow of packets
	Static Routing
	RIP v1/v2, OSPF v2 and BGP v4
	Redundancy via VRRP
	PIM (SM, DM and SD)
Proxy ARP	



OptiCore 400 Chassis

Order Information

OptiCore 800 Chassis	OptiCore-800-Chassis
OptiCore 400 Chassis	OptiCore-400-Chassis
OptiEdge 100 Chassis with Power Supply	OptiEdge-100 Chassis
Dual-port 10Gbp's Optical (XFP) module	2x10GX
Quad –port 10Gig's Optical (XFP) module	4x10GX
12-port GigE (SFP) optical module	12GX
12-port GigE (SFP) + 10Gbp's (XFP) module	1x10+12GX
24-port GigE (SFP) + Dual 10Gbp's (XFP) module	2x10+24GX
24-port GigE (SFP) optical module	24GX
24-port GigE (RJ45) electrical module	24GT
48-port GigE (RJ45) electrical module	48GT
48-port GigE (SFP) optical module	48GX
Enhanced HQoS Module	HQoS-M